

**ANTHONY**  
LIFTGATES, INC.®

**MTU-GLR-L**  
**MTU-GLR-M**

**PREMIUM PERFORMANCE  
FOR SMALL VEHICLES  
AND LOW BED HEIGHTS**



## TUCKUNDER™ SERIES


LIFTING CAPACITIES (LBS):  
2500, 3000

Phone: 815.842.3383  
Toll Free: 800.482.0003  
[www.anthonyliftgates.com](http://www.anthonyliftgates.com)

1037 W. Howard Street  
P.O. Box 615  
Pontiac, IL 61764-0615

### KEY ADVANTAGES

- 1. GLR Gentle Level Ride**  
Smooth, level up-down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.
- 2. Twin Cylinder Drive**  
Powerful lifting at low pressure helps to extend hydraulic component life.
- 3. Wedge Platform**  
Wedge design provides easy, secure loading.
- 4. Power Down**  
Reliable cycle time in all weather conditions.
- 5. Grease Free Operation**  
Greaseless bearings used at all critical pivot points to reduce wear without the need for routine lubrication.

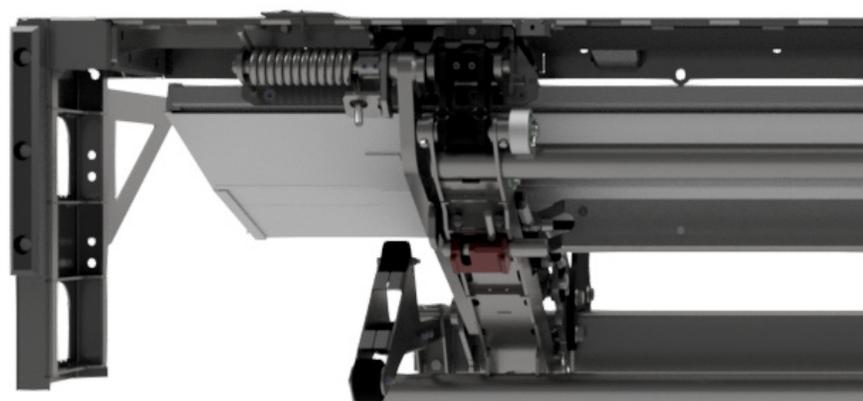

**QUALITY, RELIABILITY, CUSTOMER SERVICE**

**MADE IN THE USA** 

# STANDARD FEATURES

## Integrated ICC Bumper

Standard bumper helps to meet installation requirements without additional cost or installation time.

## Spring Assist Platform

Springs tuned to provide effortless platform operation.

## Ground Contact Rollers

Rollers prevent scraping damage to liftgate and concrete or asphalt surfaces.

## Mechanical Latch

Redundant-system stowing in addition to hydraulic lock.

## Max-Duty Dock Bumpers

All MTU's come standard with dock bumper steps, plus a selection of available upgrades.

## EZ Mount

Ships factory assembled, filled, and tested for easy installation. Standard bolt-on ready extension, bumpers, and frame.

## Circuit Protection

200 Amp fuse protects truck wiring from a "dead short."

## CHS - Centralized Hydraulic System

All sensitive hydraulic and electrical components housed safely within the pump box.

## Marine Duty Potted Toggle Switch

Heavy duty toggle, potted to separate and seal electrical connections from corrosion.

## Low Profile Reinforced Floor Extension

Rugged and attractive surface with diamond tread for added traction.

## Pressure Compensated Flow Valve

Constant, controlled speeds at all times and load conditions. Prevents "free-fall" under certain hydraulic failures.

## Premium Finishes

Aluminum platform and hot dip galvanized structure standard.

# QUALITY COMES STANDARD

## AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Available Models, Platforms, and Capacities		
Model	Capacity (lbs)	Bed Height Range
MTU-GLR-L-2500-G-A	2500	38 - 46"
MTU-GLR-L-3000-G-A	3000	38 - 46"
MTU-GLR-M-2500-G-A	2500	43 - 53"
MTU-GLR-M-3000-G-A	3000	43 - 53"
Available Platforms		
All-Aluminum 84 x 50" Wedge		

## OPTIONS

- 96" or 102" Wide Configuration
- Wireless, removable pendant control, or dual control options
- Step kits including flex steps and tail lights
- Power cutoff switches
- Dual-foot operated cart stops

## TRUCK MOUNTING REQUIREMENTS

