


ANTHONY
LIFTGATES, INC.®

ATU-GLR

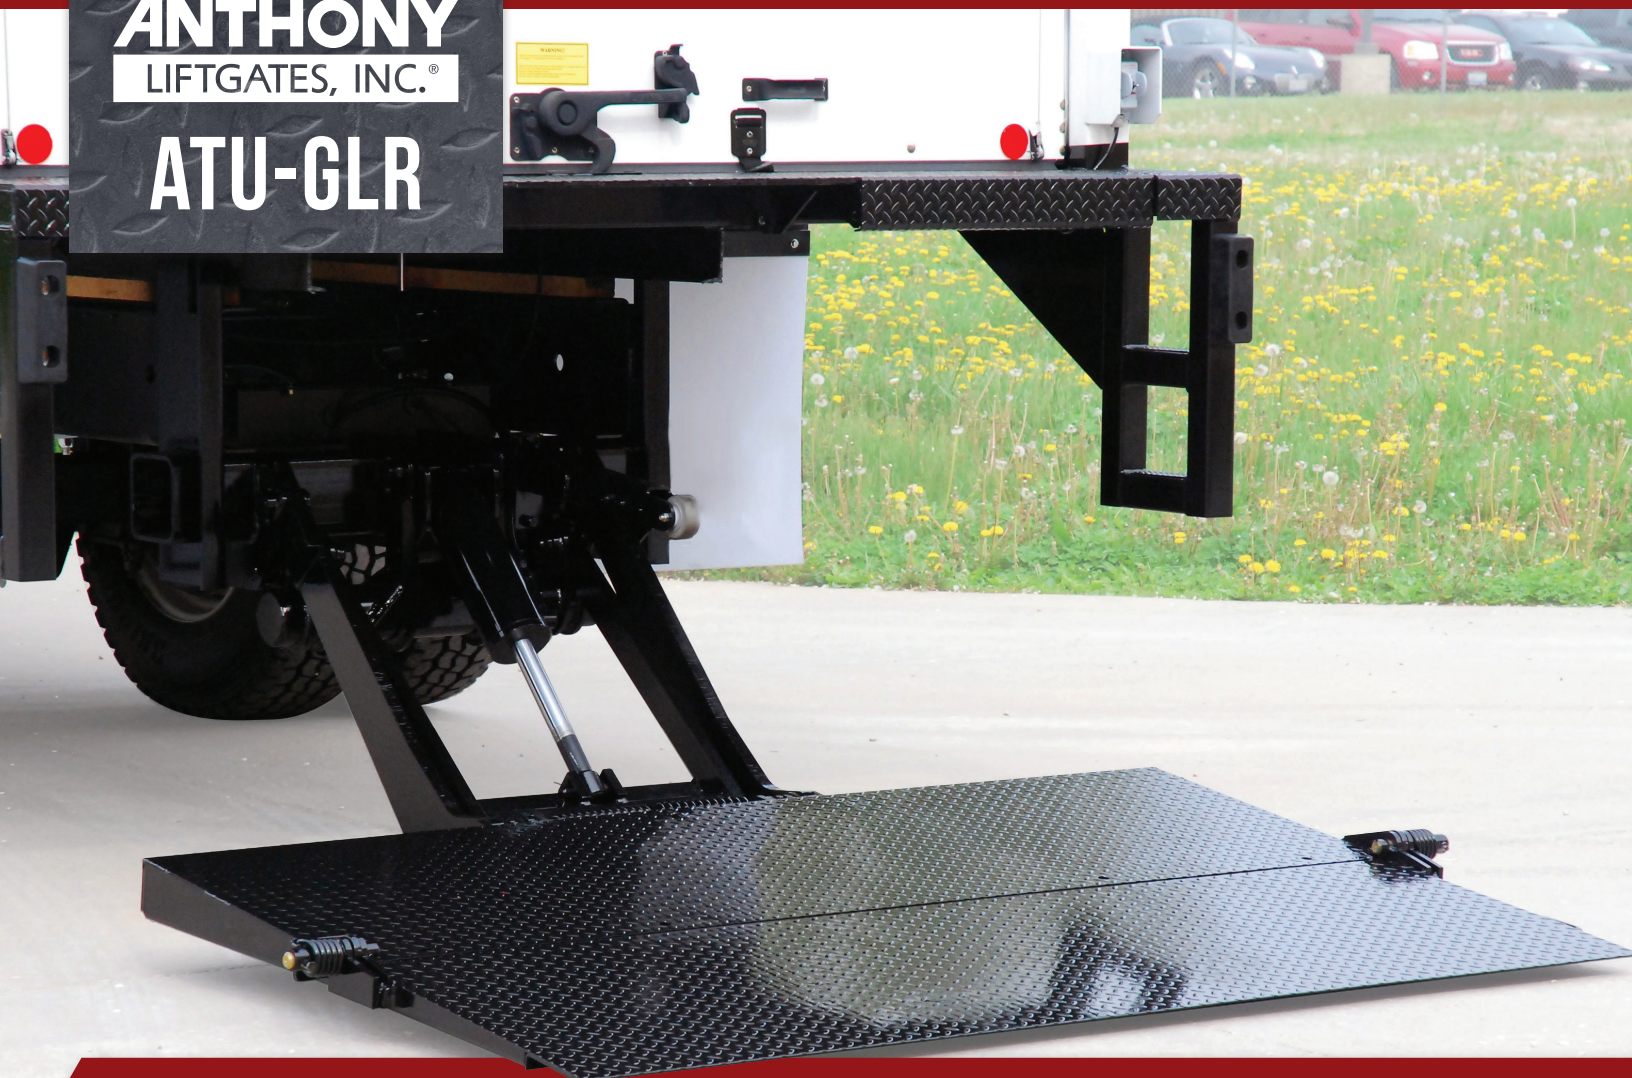

TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS): 2500, 3000



KEY ADVANTAGES

- 1. GLR - Gentle Level Ride**
Smooth, level up/down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.
- 2. Spring Assist Wedge Platform**
Dual torsion springs provide effortless platform operation.
- 3. Lifetime Warrantied Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.
- 4. EZ Mount**
Ships factory assembled, filled, and tested with notched center mark for easy installation. Floor extension may be bolted to the truck.
- 5. CHS - Centralized Hydraulic System**
All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- **Max Duty Dock Bumpers**
Helps protect floor extension from contact with dock. Includes rubber bumpers.
- **Marine Duty Potted Toggle Switch**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **Circuit Protection**
200 Amp fuse protects truck wiring from a "dead short".
- **3/16" Steel Floor Extension**
Rugged and attractive surface.
- **Industry-Leading Warranty**
3 years mechanical + 3 years electrical & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Anthony 3-Step Powder Coat**
Steel components are washed, shot blast prepped, and coated with premium finish.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES


Model	ATU-GLR-2500	ATU-GLR-3000
Capacity (lbs)	2500	3000
Bed Height Range	42" - 55"	
Available Platforms		
Steel 80" x 45" + 6" Ramped		
Steel 80" x 50" Wedge (standard)*		
Aluminum 80" x 50" Wedge*		
Aluminum 80" x 45" + 6 Ramped		
Steel 80" x 48" + 12" Aluminum Retention Ramp		

*Cart stops available. 39" load area when deployed.

OPTIONS

- Cart stops
- Power down
- Alternate floor extensions: 3/16", 1/4", or 3/8" steel. 96" or 102" Wide.
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Third step add-on for dock bumper
- Galvanized finish with extended warranty
- ICC Bumper
- Cab or ignition cutoff switch
- Battery Box

TRUCK MOUNTING REQUIREMENTS

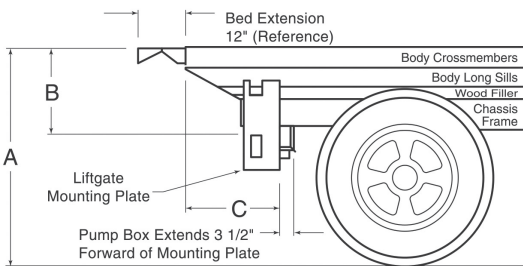A	B	C	
Bed Height	Bed to top of Tube Assembly	Mounting Plate	
42" - 49"	19"	24 1/4"	Bed Extension 12" (Reference) Body Crossmembers Body Long Sills Wood Filler Chassis Frame Liftgate Mounting Plate Pump Box Extends 3 1/2" Forward of Mounting Plate
50" - 51"	20"	23 3/4"	
52" - 53"	21"	23 1/4"	
54" - 55"	22"	22 5/8"	
56" - 57"	23"	22 1/2"	

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com