



# Anthony ATU-669 & ATU-670 Pintle Hook Brackets

## Load Capacity:

24,000 lb. pull (gross trailer weight) on Tuckunder liftgates rated at 2,500 lb. and above 10,000 lb. pull (gross trailer weight) on 1500, 1800, and 2000 lb. Tuckunder liftgates 10,000 lb. tongue (vertical load)

## Dimensional Specifications:

- Designed to fit bed heights with minimum of 42" ground clearance.
- Maximum stack height (top of floor to underside of chassis frame) of 19". *(This range will provide adequate ground clearance when liftgate is in lowered position.)*
- Approximate pintle hook height is equal to truck bed height minus 24".

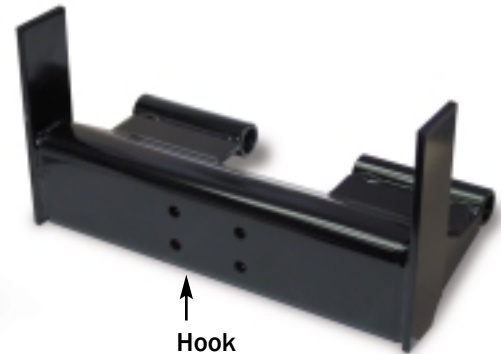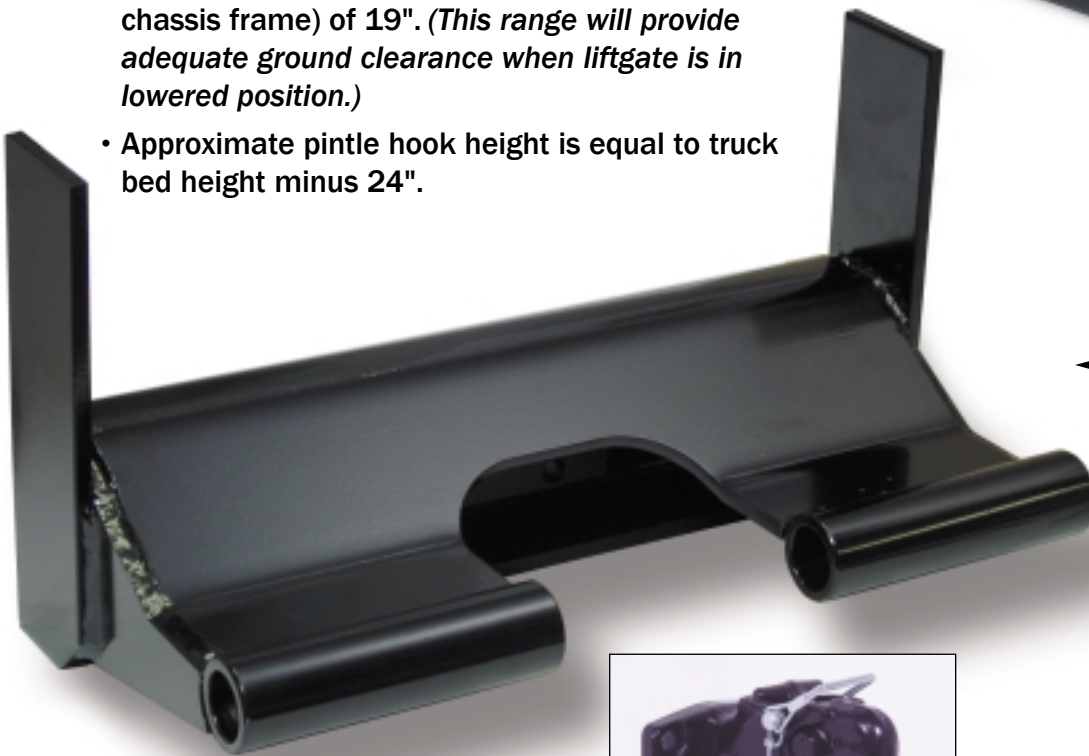

↑  
Hook mounting side – faces rear of truck.  
*(ATU-670 bracket shown)*

← Liftgate mounting side – faces front of truck.  
*(ATU-670 bracket shown)*

**ANTHONY**  
**LIFTGATES, INC.®**

Anthony Liftgates, Inc.  
1037 W. Howard Street  
P.O. Box 615  
Pontiac, IL 61764-0615  
E-mail: sales@anthonyliftgates.com

To find out about other Anthony Liftgates products and options, check out our web site at [www.anthonyliftgates.com](http://www.anthonyliftgates.com)



**Steel combination hitch**  
Sizes available:  
5 ton Combo Hitch w / 1 7/8" ball for ATU-669 Bracket  
5 ton Combo Hitch w / 2" ball for ATU-669 Bracket  
5 ton Combo Hitch w / 2 5/16" ball for ATU-669 Bracket  
8 ton Combo Hitch w / 2 5/16" ball for ATU-670 Bracket



**Heavy-duty pintle hook**  
Sizes available:  
5 ton Pintle Hook for ATU-669 Bracket  
12 ton Pintle Hook for ATU-670 Bracket

*Pintle hooks and combination hitches may be ordered together with the ATU-669 or ATU-670 Bracket or purchased separately. Contact your truck dealer, equipment distributor, or call Anthony Liftgates at 815-842-3383 for full details.*