

**ANTHONY**  
LIFTGATES, INC.®

**MTU-GLR**

Fully updated for 2026 - Every  
MTU is now lighter, stronger,  
and easier to install!



## TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS):  
2500, 3000, 4000, 5500

### KEY ADVANTAGES

- 1. Wedge Platform**  
Wedge design provides easy, secure loading.
- 2. GLR Gentle Level Ride**  
Smooth, level up-down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.
- 3. Twin Cylinder Drive**  
Powerful lift with low pressure helps to extend hydraulic component life.
- 4. Power Down**  
Reliable cycle time in all weather conditions.
- 5. Grease Free Operation**  
Greaseless bearings used at all critical pivot points to reduce wear without the need for routine lubrication.



**QUALITY, RELIABILITY, CUSTOMER SERVICE**

**MADE IN THE USA** 

# STANDARD FEATURES

**- Integrated ICC Bumper**

Standard bumper helps to meet installation requirements without additional cost or installation time.

**- Spring Assist Platform**

Quick-change springs make for easy operation and effortless service without the need to detach platform sections.

**- Ground Contact Rollers**

Rollers prevent scraping damage to liftgate and concrete or asphalt surfaces.

**- Extreme-Duty Dock Bumpers & Floor Extensions**

Floor extension and bumper steps built to withstand the load conditions of class 6-8 trucks and trailers.

**- EZ Mount**

Ships factory assembled, filled, and tested for easy installation. Standard bolt-on ready extension, bumpers, and frame.

**- Circuit Protection**

200 Amp fuse protects truck wiring from a "dead short."

**- Marine Duty Potted Toggle Switch**

Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.

**- Pressure Compensated Flow Valves**

Constant, controlled speeds at all times and load conditions. Prevents "free-fall" under certain hydraulic failures.

**- Premium Finishes**

Aluminum platform and hot dip galvanized structure standard.

# QUALITY COMES STANDARD

## AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Model	Capacity (lbs)	Bed Height Range
MTU-GLR-2500	2500	46 - 55"
MTU-GLR-3000	3000	46 - 55"
MTU-GLR-4000	4000	47 - 55"
MTU-GLR-5500	5500	47 - 55"
MTU-GLR-HR-4000	4000	55 - 65"


Available Platforms

84 x 60" Aluminum Platform

## OPTIONS

- 96" or 102" Wide Configurations
- Wireless, Removable Pendant Control, or Dual Control Options
- Step kits including flex steps and tail lights
- Power cutoff switches
- Trailer power kits and US/CAN certified RUG

## TRUCK MOUNTING REQUIREMENTS

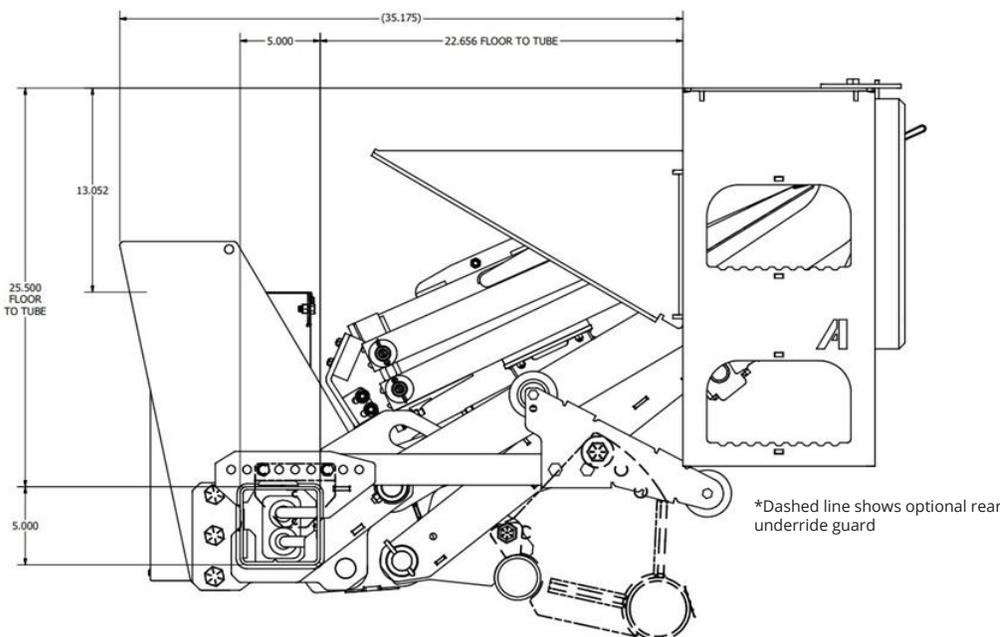

**Anthony Liftgates, Inc.**

1037 W. Howard Street  
P.O. Box 615  
Pontiac, IL 61764-0615

**Phone:** 815.842.3383

**Fax:** 815.844.3612

**Toll Free:** 800.482.0003

**www.anthonyliftgates.com**